



CHANDERNAGOFE MUNICIPAL CORPORATION

No.IA/Tend/2025-26/237

Dated. 28.11.2025

URGENT NOTICE INVITING QUOTATION:

Fund: APAS.

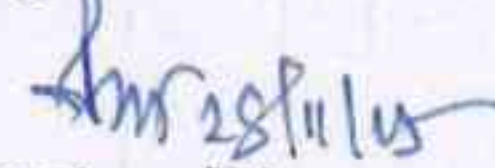
Sealed tenders are invited from the experienced, resourceful and interested Vendors/Suppliers/Contractors to complete the work of the following items required for Electric Dept. under the control of this Corporation individually or unanimously. Vendors/Suppliers/Contractors may participate for both individually or unanimously of the following works.

Quotations are to be given on or before 05.12.2025 within 3 p.m. and will be opened on the same day at 3.30 p.m. Rates should be inclusive of all the taxes and other incidental charges if any. In case of accepted tenderers whose rates have been accepted, fails to supply the required items within the stipulated date & time, necessary items will be purchased from the available sources and the difference in cost will be recovered from the tenderers. The Corporation reserves the right to accept or reject any tender without assigning any reason whatsoever.

Sl. No.	Description of the Items	Booth No	Sl. No.	Ward No.	Quantity Required	Rate Required
1.	Installation of LED lights at Birinchibagan & Mukherjee Bagan.	86	07	15	One Job	Entire Work
2.	Installation of decorative pole with bright LED Light in front of hose of Jayanta Das at halderpara Neogi Bagan.	87	02	15	One Job	Entire Work

Enco: Estimate of all Works are attached herewith.

PAN, GST and Copy of Trade Enlistment Certificate are Mandatory in this regard.


Commissioner/Secretary/Finance Officer
Chandernagore Municipal Corporation

Secretary

Chandannagar Municipal Corporation

No.IA/Tend/2025-26/237/1 (12)

Dated. 28.11.2025

Copy to :-

1. Mayor
2. Dy Mayor
3. MMIC (Street Light / Education / Trade Licence / Health / W.W / Sports / Store & Garage)
4. Commissioner/Secretary/Finance Officer
5. Engineer
6. A. O.
7. SAE (Elect)
8. S.A.-1 Please publish in Office Website.
9. Rabindra Bhaban
10. Office Notice Board


Commissioner/Secretary/Finance Officer
Chandernagore Municipal Corporation

Secretary

Chandannagar Municipal Corporation

CHANDERNAGORE MUNICIPAL CORPORATION
ESTIMATE

APAS

Estimated Cost:- Rs.58,171/-

Date of Completion: 7 days

Name of the work :- Installation of LED lights at Birinchibagan & Mukherjeebagan Under
APAS Scheme -- Booth 86_sl no 07_w 15

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [Make-Crompton /Philips Havells] Warranty Period- 7 Years Ref: Rate Redrive	10	Nos	2179.46	21794.60
2	Supply and delivery of 45 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [Make-Crompton /Philips Havells] Warranty Period- 7 Years Ref: Rate Redrive	1	No.	3579.46	3579.46
3	Supply and delivery of 90 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [Make-Crompton /Philips Havells] Warranty Period- 7 Years Ref: Rate Redrive	1	No.	6458.04	6458.04
4	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting REF: PWD (ELECTRICAL) SCHEDULE 2014, H-5, H(4)	12	Nos	1335.00	16020.00
	Sub Total		RS		47,852.10
	Add (@18%) Gst		RS		8,613.38
	Sub Total		RS		56,465.48
	Add (@1%) Cess		RS		564.65
	Total		Rs		57,030.13
	Add (@2%) Contingency		RS		1,140.60
	Total		Rs		58,170.74

[Signature]
17.11.2015
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

[Signature]
17/11/25
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

[Signature]

COMMISSIONER
CHANDERNAGORE MUNICIPAL CORPORATION

[Signature]
MAYOR

CHANDERNAGORE MUNICIPAL CORPORATION

CHANDERNAGORE MUNICIPAL CORPORATION

ESTIMATE

APAS

Estimated Cost:- Rs.41,855/-


Date of Completion: 7 days

Name of the work :- Installation of LED lights at east and west side of Baropukurdhar Under
APAS Scheme -- Booth 89_sl no 02_w 15

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [Make-Crompton /Philips Havells] Warranty Period- 7 Years Ref: Rate Redrive	7	Nos	2179.46	15256.22
2	Supply and delivery of 45 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [Make-Crompton /Philips Havells] Warranty Period- 7 Years Ref: Rate Redrive	2	Nos	3579.46	7158.92
3	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting Ref: PWD(Electrical) Schedule 2014, H-5,H(4)	9	Nos	1335.00	12015.00
Sub Total				RS	34,430.14
Add (@18%) Gst				RS	6,197.43
Sub Total				RS	40,627.57
Add (@1%) Cess				RS	406.28
Total				Rs	41,033.84
Add (@2%) Contingency				RS	820.68
Total				Rs	41,854.52


17-11-2025
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION


17/11/25
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL
CORPORATION


COMMISSIONER
CHANDERNAGORE MUNICIPAL CORPORATION


MAYOR
CHANDERNAGORE MUNICIPAL
CORPORATION

CHANDERNAGORE MUNICIPAL CORPORATION
ESTIMATE

APAS

Estimated Cost:- Rs.49,535/-

Date of Completion: 10 days

Name of the work :- Installation of decorative pole with Bright LED light in front of house of Jayanta Das at
Halderpara Neogi Bagan under
APAS Scheme -- Booth 87 sl no 02 ward no 15

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supplying of Swaged Steel Tubular pole (IS 2713, Pt. II 1980) for following designation and of following dimensions ---- 410-SP-33; 9.0mtrs: 164 Kg	1	No.	14238	14238
	Ref: UDMA(E/M) (Vol 1) Schedule 2018, page-3,1 (j)				
2	Erection of Single Steel tubular pole of length as given below with/without sole plate & Cap etc. in CC foundation (Proportion and dimension indicated below), having 600x600x150 mm thick CC (4:2:1) base block below sole plate/pole with hard jhama metal including CC (6:3:1) muffing 0.30 mts. dia and 0.30 mts. above ground level including 3 mm thick neat cemented finish and GI earth bolt after making drilled holes etc. on pole & carriage of pole upto 1.6 Km from Store to work-site including filling up the excavated earth pit with shifted soil and ramming properly ---- Upto 9.0 mtr. Size 0.6x0.6x1.70 mts	1	No.	2835.00	2835.00
	Ref: PWD(Electrical) Schedule 2017, H-1, (A)1(a)				
3	Extra on items 1 & 2 above, for providing CC (6:3:1) base block (around the pole) dimension 0.45x0.45x0.60 mt. above ground level, neatly cemented finish (3 mm thick), at the base pole (in lieu of CC muffing) suitable for alkathene/ polythene pipe entry as directed for street light wiring, incl. S & F 20cmx15cmx10cm GI Loop box, 16SWG & incl. drilled hole in pole	1	No.	740.00	740.00
	Ref: PWD(Electrical) Schedule 2017, H-1, (A)3(a)(ii)				
4	Painting of Steel Tubular Pole of lengths and no. of coats of paint, as given below with ready mixed paint/primer of approved make, and brand incl. preparation of surface by sand paper/emery paper, cleaning etc. for receiving fresh coat of paint ---- (a) Upto 9.0 mtr. long pole -- (i)1st coat of aluminium paint over 1 coat of RO priming (ii)2nd coat of aluminium paint over 1st coat	1	No.	329.00	329.00
	Ref: PWD(Electrical) Schedule 2017, H-2, (A)4(a)				
5	Supplying of 1.1 KV. Grade PVC insulated Conductor of following cables (make: Polycab/ Gloster/Havells): 2 core 4sqmm	100	Mtr	73.00	7300.00
	Ref: UDMA(E/M) Schedule 2018, page-11, 1(a)1)				
6	Laying of cable upto 2 core 25 sqmm on wall/surface incl. S & F MS saddles with earthing attachment in 10 SWG GI (Hot Dip) Wire, making holes etc. as necy. mending good damages and painting ----	100	Mtr	57.00	5700.00

Ref: PWD(Electrical) Schedule 2017, F-1, 2(a)					
7	Supply and delivery of 90 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached Make-Crompton /Philips / Havells) Warranty Period- 7 Years]	1	No.	6458.04	6458.04
Ref: Rate Redrive					
8	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	1	No.	1335.00	1335.00
Ref: PWD(Electrical) Schedule 2014, H-5,H(4)					
9	Supplying and fixing 240/415 V MCB of Breaking capacity 10 KA & C characteristics on din rail of existing DBs and necessary connection --- 6-32 A SPN (Standard)	1	No.	444.00	444.00
Ref: PWD(Electrical) Schedule 2017, D-7/8					
10	Earthing with 50mm dia GI pipe 3.64mm thick x 3.04mtrs long and 1x4SWG GI (Hot Dip) wire (4mtrs long), 13mm dia x 80mm long GI bolts, double nuts, double washers incl. S&F 15mm dia GI pipe protection (1mtr long) to be filled with bitumen partly under the ground level and partly above ground level driven to an average depth of 3.65mts below the ground level as below: by ISI-Medium GI pipe	1	No.	1369.00	1369.00
Ref:PWD Schedule (Electrical)2017, Page-G-1/ 2(a)					
Sub Total				RS	40,748.04
Add (@18%) Gst				RS	7,334.65
Sub Total				RS	48,082.69
Add (@1%) Cess				RS	480.83
Total				Rs	48,563.51
Add (@2%) Contingency				RS	971.27
Total				Rs	49,534.78
Say				Rs	49,535

[Signature]
17/11/2025
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

[Signature]
17/11/25
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

[Signature]

COMMISSIONER
CHANDERNAGORE MUNICIPAL CORPORATION

COMMISSIONER

[Signature]
MAYOR

CHANDERNAGORE MUNICIPAL CORPORATION

MAYOR