



# CHANDERNAGORE MUNICIPAL CORPORATION

No.IA/Tend/2025-26/239

Dated. 29.11.2025

## URGENT NOTICE INVITING QUOTATION:

Fund: APAS.

Sealed tenders are invited from the experienced, resourceful and interested Vendors/Suppliers/Contractors to complete the work of the following items required for Electric Dept. under the control of this Corporation individually or unanimously. Vendors/Suppliers/Contractors may participate for both individually or unanimously of the following works.

Quotations are to be given on or before 08.12.2025 within 3 p.m. and will be opened on the same day at 3.30 p.m. Rates should be inclusive of all the taxes and other incidental charges if any. In case of accepted tenderers whose rates have been accepted, fails to supply the required items within the stipulated date & time, necessary items will be purchased from the available sources and the difference in cost will be recovered from the tenderers. The Corporation reserves the right to accept or reject any tender without assigning any reason whatsoever.

Sl. No.	Description of the Items	Booth No	Sl. No.	Ward No.	Quantity Required	Rate Required
1.	Enhancement of illumination at Bagbazar Surpara More.	90	15	13	One Job	Entire Work
2.	Installation of LED Lights in front of house of Swarnakar and Tapan Saha beside the road of Dr. S.P. Ghosh Adarsha Sikshalaya Schol.	90	16	13	One Job	Entire Work
3.	Enhancement of illumination beside of Dr. S.P. Ghosh Adarsha Sikshalaya School & Charu Chandra Roy Bye Lane.	90	26	13	One Job	Entire Work
4.	Installation of street Light on existing pole near Chittaranjan Byamagar Ground.	91	12	13	One Job	Entire Work
5.	Installation of street Light on existing pole near Tinbazar Pump House.	91	14	13	One Job	Entire Work
6.	Installation of LED Lights in front of Gopa Ghsh behind of Dr. S.P. Ghosh Adarsha Sikshalaya School.	90	11	13	One Job	Entire Work
7.	Enhancement of illumination from Patra Para More to Jugipukur More (Tara Maa Builders).	89	03	15	One Job	Entire Work
8.	Installation of Light at South of Gopinath Ghat beside the house of Sankar Roy & Sudhir Mallick.	97	10	12	One Job	Entire Work

**Encls: Estimate of all Works are attached herewith.**

PAN, GST and Copy of Trade Enlistment Certificate are Mandatory in this regard.

*[Signature]*  
Commissioner/Secretary/Finance Officer  
Chandernagore Municipal Corporation

*[Signature]*  
Secretary  
Chandannagar Municipal Corporation

No.IA/Tend/2025-26/239/1 (12)

Date: 29.11.2025

**Copy to :-**

1. Mayor
2. Dy Mayor
3. MMIC ( Street Light / Education / Trade Licence / Health / W.W / Sports / Store & Garage )
4. Commissioner/Secretary/Finance Officer
5. Engineer
6. A. O.
7. SAE (Elect)
8. S.A.-1 Please publish in Office Website.
9. Rabindra Bhaban
10. Office Notice Board

*[Signature]*  
Commissioner/Secretary/Finance Officer  
Chandernagore Municipal Corporation

*[Signature]*  
Secretary  
Chandannagar Municipal Corporation

# CHANDERNAGORE MUNICIPAL CORPORATION

## ESTIMATE

APAS

Estimated Cost:- Rs.15,448/-

Date of Completion: 7 days


Name of the work :- Enhancement of illumination at Bagbazar Surpara more Under  
APAS Scheme -- Booth 90\_sl no 15\_w 13

SL.No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 90 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips Havells   Warranty Period- 7 Years	1	Nos	6458.04	6458.04
	Ref: Rate Redrive				
2	Supply and delivery of 45 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips Havells   Warranty Period- 7 Years	1	Nos	3579.46	3579.46
	Ref: Rate Redrive				
3	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	2	Nos	1335.00	2670.00
	Ref: PWD(Electrical) Schedule 201 H-5,H(4)				
	<b>Sub Total</b>		RS		12,707.50
	<b>Add (@18%) Gst</b>		RS		2,287.35
	<b>Sub Total</b>		RS		14,994.85
	<b>Add (@1%) Cess</b>		RS		149.95
	<b>Total</b>		Rs		15,144.80
	<b>Add (@2%) Contingency</b>		RS		302.90
	<b>Total</b>		Rs		15,447.69

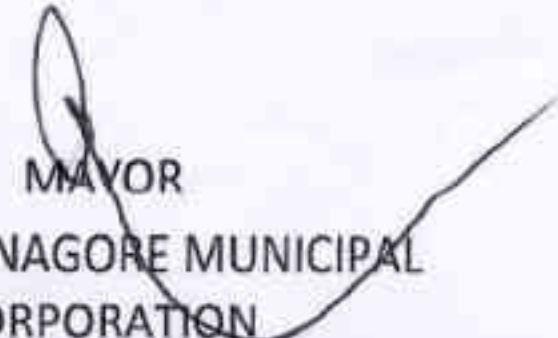
  
7.11.2025  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
17/11/25  
AE (MECHANICAL)  
CHANDERNAGORE MUNICIPAL CORPORATION

  
COMMISSIONER

CHANDERNAGORE MUNICIPAL CORPORATION

  
MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION

# CHANDERNAGORE MUNICIPAL CORPORATION

## ESTIMATE

APAS

Estimated Cost:- Rs.8,545/-


Date of Completion: 7 days

Name of the work :- Installation of LED Lights in front of house of Swarnokor & Tapan Saha beside the road of Adarsa School Under APAS Scheme -- Booth 90\_sl no 16\_w 13

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminaire with high power LED as per the detail technical proposal specification & vendor list attached [ Make-Crompton /Philips Havells ] Warranty Period- 7 Years	2	Nos	2179.46	4358.92
	Ref: Rate Redrive				
2	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	2	Nos	1335.00	2670.00
	Ref: PWD(Electrical) Schedule 2017 H-5,H(4)				
	Sub Total			RS	7,028.92
	Add (@18%) Gst			RS	1,265.21
	Sub Total			RS	8,294.13
	Add (@1%) Cess			RS	82.94
	Total			Rs	8,377.07
	Add (@2%) Contingency			RS	167.54
	Total			Rs	8,544.61

  
17.11.2025  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
17/11/25  
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION

  
MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION

# CHANDERNAGORE MUNICIPAL CORPORATION

## ESTIMATE

APAS

Estimated Cost:- Rs.21,362/-

Date of Completion: 7 days

Name of the work :- Enhancement of illumination beside of Adarsa School & Charuchandra Roy Bye lane Under  
APAS Scheme -- Booth 90\_sl no 26\_w 13

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips Havells   Warranty Period- 7 Years	5	Nos	2179.46	10897.30
	Ref: Rate Redrive				
4	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting Ref: PWD(Electrical) SCHEDULE 2017, H-5, H(4)	5	Nos	1335.00	6675.00
	Sub Total			RS	17,572.30
	Add (@18%) Gst			RS	3,163.01
	Sub Total			RS	20,735.31
	Add (@1%) Cess			RS	207.35
	Total			Rs	20,942.67
	Add (@2%) Contingency			RS	418.85
	Total			Rs	21,361.52


  
17.11.2015  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
17/11/25  
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION

  
MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION

# CHANDERNAGORE MUNICIPAL CORPORATION

## ESTIMATE

Estimated Cost:- Rs. 18,947/-

Date of Completion: 7 days

Name of the work :- Installation of street light on existing Pole near Chittaranjan Byamagar Ground Under APAS Scheme -- Booth 91 sl no:-12 ward 13


SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 90 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips/Havells Warranty Period- 7 Years Ref: Rate Redrive	2	Nos	6458.04	12916.08
2	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting Ref: PWD(Electrical) Schedule 2017, H-5,H(4)	2	Nos	1335.00	2670.00
Sub Total				RS	15,586.08
Add (@18%) Gst				RS	2,805.49
Sub Total				RS	18,391.57
Add (@1%) Cess				RS	183.92
Total				Rs	18,575.49
Add (@2%) Contingency				RS	371.51
Total				Rs	18,947.00

  
17.11.2015  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
17/11/25  
AE (MECHANICAL)  
CHANDERNAGORE MUNICIPAL CORPORATION

  
COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION

  
MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION

APAS

# CHANDERNAGORE MUNICIPAL CORPORATION

## ESTIMATE

Estimated Cost:- Rs. 4,272/-

Date of Completion: 7 days

Name of the work :- Installation of street light on existing Poles near Tinbazar Pump House Under APAS Scheme -- Booth 91 sl no:-14 ward 13

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips/Havells Warrantv Period- 7 Years Ref: Rate Redrive	1	No.	2179.46	2179.46
2	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting Ref: PWD(Electrical) Schedule 2017, H-5,H(4)	1	No.	1335.00	1335.00
Sub Total				RS	3,514.46
Add (@18%) Gst				RS	632.60
Sub Total				RS	4,147.06
Add (@1%) Cess				RS	41.47
Total				Rs	4,188.53
Add (@2%) Contingency				RS	83.77
Total				Rs	4,272.30

*[Signature]*  
17.11.2025

SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

*[Signature]*  
17/11/25

AE (MECHANICAL)  
CHANDERNAGORE MUNICIPAL CORPORATION

*[Signature]*

COMMISSIONER

CHANDERNAGORE MUNICIPAL CORPORATION

*[Signature]*  
MAYOR

CHANDERNAGORE MUNICIPAL CORPORATION

# CHANDERNAGORE MUNICIPAL CORPORATION

## ESTIMATE

APAS

Estimated Cost:- Rs.8,545/-

Date of Completion: 7 days

Name of the work :- Installation of LED Lights in front of house of Gopa Ghosh behind of Adarsa School Under  
APAS Scheme -- Booth 90\_sl no 11\_w 13

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminaire with high power LED as per the detail technical proposal specification & vendor list attached [ Make-Crompton /Philips Havells ] Warranty Period- 7 Years	2	Nos	2179.46	4358.92
	Ref: Rate Redrive				
2	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	2	Nos	1335.00	2670.00
	Ref: PWD(Electrical) Schedule 2017 H-5.H(4)				
	Sub Total			RS	7,028.92
	Add (@18%) Gst			RS	1,265.21
	Sub Total			RS	8,294.13
	Add (@1%) Cess			RS	82.94
	Total			Rs	8,377.07
	Add (@2%) Contingency			RS	167.54
	Total			Rs	8,544.61


  
17-11-2025  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
17/11/25  
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION

  
MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION

# CHANDERNAGORE MUNICIPAL CORPORATION

## ESTIMATE

APAS


Estimated Cost:- Rs.17,089/-

Date of Completion: 7 days

Name of the work :- Enhancement of illumination from Patrapara more to Jugipukur more (Tara Maa Builders) Under


APAS Scheme -- Booth 89\_sl no 03\_w 15


SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips Havells   Warranty Period- 7 Years	4	Nos	2179.46	8717.84
	Ref: Rate Redrive				
2	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	4	Nos	1335.00	5340.00
	Ref: PWD(Electrical) Schedule 2014, H-5,H(4)				
	Sub Total			RS	14,057.84
	Add (@18%) Gst			RS	2,530.41
	Sub Total			RS	16,588.25
	Add (@1%) Cess			RS	165.88
	Total			Rs	16,754.13
	Add (@2%) Contingency			RS	335.08
	Total			Rs	17,089.22

  
17.11.2025  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
AE (MECHANICAL) 13/11/25  
CHANDERNAGORE MUNICIPAL CORPORATION

  
COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION

  
MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION

**CHANDERNAGORE MUNICIPAL CORPORATION**  
**ESTIMATE**

APAS

Estimated Cost:- Rs. 4,272/-

Date of Completion: 7 days

Name of the work :- Installation of light at south of Gopinath Ghat beside the house of Sankar Roy & Sudhir Mallick Under APAS Scheme -- Booth 97 sl no:-10 ward 12

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [ Make-Crompton /Philips/Havells Warranty Period- 7 Years ]	1	No.	2179.46	2179.46
	Ref: Rate Redrive				
2	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	1	No.	1335.00	1335.00
	Ref: PWD(Electrical) Schedule 2017, H-5,H(4)				
	<b>Sub Total</b>			RS	3,514.46
	Add (@18%) Gst			RS	632.60
	<b>Sub Total</b>			RS	4,147.06
	Add (@1%) Cess			RS	41.47
	<b>Total</b>			Rs	4,188.53
	Add (@2%) Contingency			RS	83.77
	<b>Total</b>			Rs	4,272.30

*[Signature]*  
17/11/2025  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

*[Signature]*  
17/11/25  
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

*[Signature]*

COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION

*[Signature]*

MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION