



CHANDERNAGORE MUNICIPAL CORPORATION

No.IA/Tend/2025-26/194/D

Dated. 11.11.2025

URGENT NOTICE INVITING QUOTATION:

Fund: Line Dept. Govt. Grant.

Sealed tenders are invited from the experienced, resourceful and interested Vendors/Suppliers/Contractors to complete the work of the following items required for Electric Dept. under the control of this Corporation individually or unanimously. Vendors/Suppliers/Contractors may participate for both individually or unanimously of the following works.


Quotations are to be given on or before 18.11.2025 within 3 p.m. and will be opened on the same day at 3.30 p.m. Rates should be inclusive of all the taxes and other incidental charges if any. In case of accepted tenderers whose rates have been accepted, fails to supply the required items within the stipulated date & time, necessary items will be purchased from the available sources and the difference in cost will be recovered from the tenderers. The Corporation reserves the right to accept or reject any tender without assigning any reason whatsoever.

Sl. No.	Description of the Items	Booth No	Sl. No.	Ward No.	Quantity Required	Rate Required
1.	Installation of electric pole with light beside Saheb Bagan Nabaratna palli playground.	120	05	18	One Job	Entire Work

Encls: Estimate of all Works are attached herewith.

Laying of cable upto 2 core 19 sqmm on wall surface incl. S.A.F 115 saddle with cutting attachment in 16 SWG GI (Hot Dip) Wire, making holes etc. as may be required and painting etc.

PAN, GST and Copy of Trade Enlistment Certificate are Mandatory in this regard.

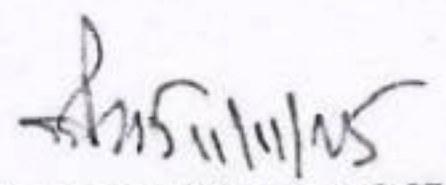

Commissioner/Secretary/Finance Officer
Chandernagore Municipal Corporation

No.IA/Tend/2025-26/194/D/1 (12)

Dated. 11.11.2025

Copy to :-

1. Mayor
2. Dy Mayor
3. MMIC (Street Light / Education / Trade Licence / Health / W.W / Sports / Store & Garage)
4. Commissioner/Secretary/Finance Officer
5. Engineer
6. A. O.
7. SAE (Elect)
8. S.A.-1 Please publish in Office Website.
9. Office Notice Board


Commissioner/Secretary/Finance Officer
Chandernagore Municipal Corporation

CHANDERNAGORE MUNICIPAL CORPORATION

ESTIMATE


Estimated Cost:- Rs.91,399/-

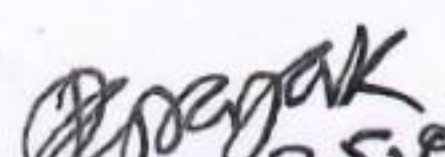
Date of Completion: 7 days

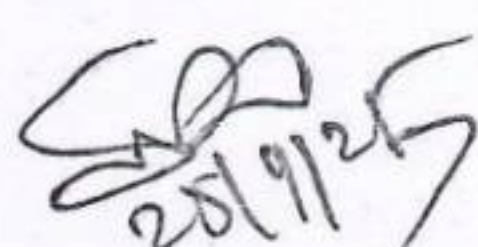
Name of the work :- Installation of electric pole with light beside Saheb Bagan Nabaratna palli play ground Under APAS
Scheme -- Booth 120_sl no 5_w18

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supplying of Swaged Steel Tubular pole (IS 2713, Pt. II 1980) for following designation and of following dimensions ---- 4 SWG; 4.5mtrs; 40 Kg Ref: UDMA(E/M) (Vol 1) Schedule 2018, page-3,1 (a)	3	Nos	3541	10623
2	S/F double arm projected lamp bracket (Single pipe bending) of 50mm (2") dia G.I. pipe (ISI medium) of 2.5 mtr long each having 105 degree curvature with reducing socket to be fitted at the top of the pole with bolts, nuts clamps etc. as required Ref: UDMA(E/M) (Vol 1) Schedule 2018, page-5, 23	3	Nos	2491	7473
3	Erection of Single Steel tubular pole of length as given below with/without sole plate & Cap etc. in CC foundation (Proportion and dimension indicated below), having 600x600x150 mm thick CC (4:2:1) base block below sole plate/pole with hard jhama metal including CC (6:3:1) muffing 0.30 mts. dia and 0.30 mts. above ground level including 3 mm thick neat cemented finish and GI earth bolt after making drilled holes etc. on pole & carriage of pole upto 1.6 Km from Store to work-site including filling up the excavated earth pit with shifted soil and ramming properly ---- Upto 9.0 mtr. Size 0.6x0.6x1.70 mts Ref: PWD(Electrical) Schedule 2017, H-1, (A)1(a)	3	Nos	2835.00	8505.00
4	Extra on items 1& 2 above, for providing CC (6:3:1) base block (around the pole) dimension 0.45x0.45x0.60 mt. above ground level, neatly cemented finish (3 mm thick), at the base pole (in lieu of CC muffing) suitable for alkathene/polythene pipe entry as directed for street light wiring, incl. S & F 20cmx15cmx10cm GI Loop box, 16SWG & incl. drilled hole in pole Ref: PWD(Electrical) Schedule 2017, H-1, (A)3(a)(ii)	3	Nos	740.00	2220.00
5	Painting of Steel Tubular Pole of lengths and no. of coats of paint, as given below with ready mixed paint/primer of approved make, and brand incl. preparation of surface by sand paper/emery paper, cleaning etc. for receiving fresh coat of paint ---- (a) Upto 9.0 mtr. long pole -- (i)1st coat of aluminium paint over 1 coat of RO priming (ii)2nd coat of aluminium paint over 1st coat Ref: PWD(Electrical) Schedule 2017, H-2, (A)4(a)	3	Nos	329.00	987.00
6	Supplying of Aluminium armoured cables:2 core 4sqmm Ref: PWD(Electrical) Schedule 2014, K-10	100	Mtr	81.00	8100.00
7	Laying of cable as below, after cutting floor/pavement/wall/ and making holes incl., embedding the cable at an average depth as below and mending good the damages to original finish incl. removing the rubbish -- From 2.5 sqmm to 35 sqmm at an average depth of 75 mm in floor/pavement/wall etc. Ref: PWD(Electrical) Schedule 2017, F-3, 5(i)	100	Mtr	127.00	12700.00
8	Supplying and fixing compression type gland complete with brass gland, brass ring, rubber ring for dust and moisture proof entry of XLPE/PVC armoured cables as below ---- 2 core 4sqmm Ref: PWD(Electrical) Schedule 2017, F-4/7(a)	3	Nos	63.00	189.00

	of the XLPE/PVC insulated armoured cable ends by crimping method supplying and fixing solderless socket(Dowels) type anticorrosive paste and ing materials---- 2 core 4sqmm Ref: PWD(Electrical) Schedule 2017, F-5/8(b) (i)	3	Sets	31.00	93.00
10	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [Make-Crompton/Philips/Havells Warranty Period- 7 Years] Ref: Rate Redrive	6	Nos	2179.46	13076.76
11	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting & painting Ref: PWD(Electrical) Schedule 2014, H-5,H(4)	6	Nos	1335.00	8010.00
12	Supplying and fixing 240/415V MCB of Breaking capacity 10kA&C characteristics on din rail of existing DBs and necessary connection-- 6-32 A [Legrand / Schneider/ Crabtree] Ref: PWD(Electrical) Schedule 2017, D-6/7	3	Nos	157.00	471.00
13	Earthing with 50mm dia GI pipe 3.64mm thick x 3.04mtrs long and 1x4SWG GI (Hot Dip) wire (4mtrs long), 13mm dia x 80mm long GI bolts, double nuts, double washers incl. S&F 15mm dia GI pipe protection (1mtr long) to be filled with bitumen partly under the ground level and partly above ground level driven to an average depth of 3.65mts below the ground level as below: by ISI- Medium GI pipe Ref:PWD Schedule (Electrical)2017, Page-G-1/ 2(a)	2	Nos	1369.00	2738.00
Sub Total			RS		75,185.76
Add (@18%) Gst			RS		13,533.44
Sub Total			RS		88,719.20
Add (@1%) Cess			RS		887.19
Total			Rs		89,606.39
Add (@2%) Contingeny			RS		1,792.13
Total			Rs		91,398.52


 25.09.2025
 SAE (ELECTRICAL)
 CHANDERNAGORE MUNICIPAL CORPORATION


 25.09.25
 AE (MECHANICAL)
 CHANDERNAGORE MUNICIPAL
 CORPORATION


 25/9/25
 COMMISSIONER
 CHANDERNAGORE MUNICIPAL CORPORATION


 MAYOR
 CHANDERNAGORE MUNICIPAL
 CORPORATION