



# CHANDERNAGORE MUNICIPAL CORPORATION

No.IA/Tend/2025-26/219

Dated. 28.11.2025

## URGENT NOTICE INVITING QUOTATION:

Fund: APAS.

Sealed tenders are invited from the experienced, resourceful and interested Vendors/Suppliers/Contractors to complete the work of the following items required for Electric Dept. under the control of this Corporation individually or unanimously. Vendors/Suppliers/Contractors may participate for both individually or unanimously of the following works.

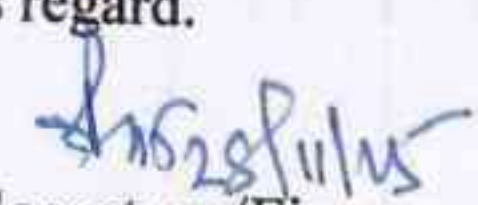
Quotations are to be given on or before 05.12.2025 within 3 p.m. and will be opened on the same day at 3.30 p.m. Rates should be inclusive of all the taxes and other incidental charges if any. In case of accepted tenderers whose rates have been accepted, fails to supply the required items within the stipulated date & time, necessary items will be purchased from the available sources and the difference in cost will be recovered from the tenderers. The Corporation reserves the right to accept or reject any tender without assigning any reason whatsoever.

Sl. No.	Description of the Items	Booth No	Sl. No.	Ward No.	Quantity Required	Rate Required
1.	Enhancement of Illumination on Electric post in front house of Sekhar Das at Bosepara Harishabha Lane.	140	19	23	One Job	Entire Work
2.	Installation of Electric Pole with light beside 2 No. Niranjana Nagar Ground.	128	08	X	One Job	Entire Work
3.	Enhancement of Illumination at the poles at Dinemardanga Hothath Colony.	146	12	22	One Job	Entire Work
4.	Enhancement of Illumination in front of the house of Ashok Santra at Dinemardanga.	146	05	22	One Job	Entire Work

**Encl: Estimate of all Works are attached herewith.**

Copy of table upto 2 size 21 open on wall surface and 3 x 4 PM add on with cutting attachment to MMIC (the Dept) W/o, taking into the way, sending good design and planing...

PAN, GST and Copy of Trade Enlistment Certificate are Mandatory in this regard.

  
Commissioner/Secretary/Finance Officer  
Chandernagore Municipal Corporation

Secretary

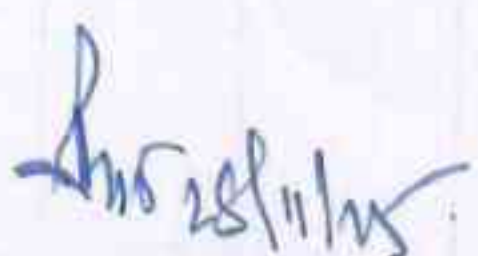
Chandannagar Municipal Corporation

No.IA/Tend/2025-26/219/1 (12)

Dated. 28.11.2025

**Copy to :-**

1. Mayor
2. Dy Mayor
3. MMIC ( Street Light / Education / Trade Licence / Health / W.W / Sports / Store & Garage )
4. Commissioner/Secretary/Finance Officer
5. Engineer
6. A. O.
7. SAE (Elect)
8. S.A.-1 Please publish in Office Website.
9. Rabindra Bhaban
10. Office Notice Board

  
Commissioner/Secretary/Finance Officer  
Chandernagore Municipal Corporation

Secretary

Chandannagar Municipal Corporation

# CHANDERNAGORE MUNICIPAL CORPORATION

## ESTIMATE


Estimated Cost:- Rs. 4,272/-

Date of Completion: 7 days

Name of the work :- Enhancement of illumination on electric post in front house of Sekhar Das at  
Bosepara Harisabha Lane Under  
APAS Scheme -- Booth 140 sl no:-19 ward 23

APAS

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [ Make-Crompton /Philips/Havells Warranty Period- 7 Years ]	1	No.	2179.46	2179.46
	Ref: Rate Redrive				
2	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	1	No.	1335.00	1335.00
	Ref: PWD(Electrical) Schedule 2014, H-5,H(4)				
	<b>Sub Total</b>			RS	3,514.46
	<b>Add (@18%) Gst</b>			RS	632.60
	<b>Sub Total</b>			RS	4,147.06
	<b>Add (@1%) Cess</b>			RS	41.47
	<b>Total</b>			Rs	4,188.53
	<b>Add (@2%) Contingency</b>			RS	83.77
	<b>Total</b>			Rs	4,272.30

  
16.10.2025  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION  
Sub-Asstt. Engineer (Elec.)  
Chandernagore Municipal Corporation



COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION

Commissioner  
Chandernagore Municipal Corporation

  
16.10.2025  
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION  
Asstt. Engineer (Mech.)  
Chandernagore Municipal Corporation

  
MAYOR

CHANDERNAGORE MUNICIPAL CORPORATION

Mayor  
Chandernagore Municipal Corporation

**CHANDERNAGORE MUNICIPAL CORPORATION**  
**ESTIMATE**

APAS.


Estimated Cost:- Rs.35,991/-


Date of Completion: 7 days

Name of the work :- Installation of Electric Pole with light beside 2 no Niranjan Nagar Ground Under  
APAS Scheme -- Booth 128 sl no 08

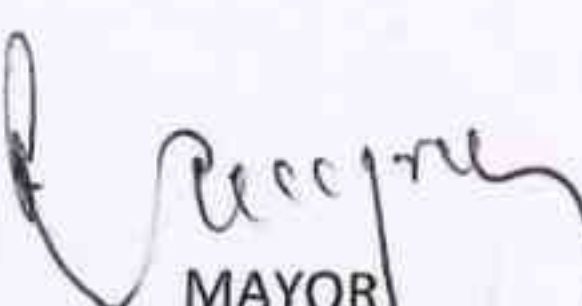
SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supplying of Swaged Steel Tubular pole (IS 2713, Pt. II 1980) for following designation and of following dimensions ---- 410-SP-30 ; 9.0mtrs: 133 Kg	1	No.	11547	11547
	Ref: UDMA(E/M) (Vol I) Schedule 2018, page-3,1 (i)				
2	Erection of Single Steel tubular pole of length as given below with/without sole plate & Cap etc. in CC foundation (Proportion and dimension indicated below), having 600x600x150 mm thick CC (4:2:1) base block below sole plate/pole with hard jhama metal including CC (6:3:1) muffing 0.30 mts. dia and 0.30 mts. above ground level including 3 mm thick neat cemented finish and GI earth bolt after making drilled holes etc. on pole & carriage of pole upto 1.6 Km from Store to work-site including filling up the excavated earth pit with shifted soil and ramming properly ---- Upto 9.0 mtr. Size 0.6x0.6x1.70 mts	1	No.	2835.00	2835.00
	Ref: PWD(Electrical) Schedule 2017, H-1, (A)1(a)				
3	Extra on items 1& 2 above, for providing CC (6:3:1) base block (around the pole) dimension 0.45x0.45x0.60 mt. above ground level, neatly cemented finish (3 mm thick), at the base pole (in lieu of CC muffing) suitable for alkathene/ polythene pipe entry as directed for street light wiring, incl. S & F 20cmx15cmx10cm GI Loop box, 16SWG & incl. drilled hole in pole	1	No.	740.00	740.00
	Ref: PWD(Electrical) Schedule 2017, H-1, (A)3(a)(ii)				
4	Painting of Steel Tubular Pole of lengths and no. of coats of paint, as given below with ready mixed paint/primer of approved make, and brand incl. preparation of surface by sand paper/emery paper, cleaning etc. for receiving fresh coat of paint ---- (a) Upto 9.0 mtr. long pole -- (i)1st coat of aluminium paint over 1 coat of RO priming (ii)2nd coat of aluminium paint over 1st coat	1	No.	329.00	329.00
	Ref: PWD(Electrical) Schedule 2017, H-2, (A)4(a)				
5	Supplying of 1.1 KV. Grade PVC insulated Conductor of following cables (make: Polycab/ Gloster/Havells/): 2 core 4sqmm	35	Mtr	73.00	2555.00
	Ref: UDMA(E/M) Schedule 2018, page-13, 1(a)1)				
6	Laying of cable upto 2 core 25 sqmm on wall/surface incl. S & F MS saddles with earthing attachment in 10 SWG GI (Hot Dip) Wire, making holes etc. as necy. mending good damages and painting ----	35	Mtr	57.00	1995.00
	Ref: PWD(Electrical) Schedule 2017, F-1, 2(a)				

7	Supply and delivery of 90 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips/ Havells   Warranty Period- 7 Years	1	No.	6458.04	6458.04
	Ref: Rate Redrive				
8	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	1	No.	1335.00	1335.00
	Ref: PWD(Electrical) Schedule 2014, H-5,H(4)				
9	Supplying and fixing 240/415 V MCB of Breaking capacity 10 KA & C characteristics on din rail of existing DBs and necessary connection --- 6-32 A SPN ( Standard )	1	No.	444.00	444.00
	Ref: PWD(Electrical) Schedule 2017, D-7/8				
10	Earthing with 50mm dia GI pipe 3.64mm thick x 3.04mtrs long and 1x4SWG GI (Hot Dip) wire (4mtrs long), 13mm dia x 80mm long GI bolts, double nuts, double washers incl. S&F 15mm dia GI pipe protection (1mtr long) to be filled with bitumen partly under the ground level and partly above ground level driven to an average depth of 3.65mtrs below the ground level as below: by ISI-Medium GI pipe	1	No.	1369.00	1369.00
	Ref:PWD Schedule (Electrical)2017, Page-G-1/ 2(a)				
	Sub Total			RS	29,607.04
	Add (@18%) Gst			RS	5,329.27
	Sub Total			RS	34,936.31
	Add (@1%) Cess			RS	349.36
	Total			Rs	35,285.67
	Add (@2%) Contingency			RS	705.71
	Total			Rs	35,991.38
	Say			Rs	35,991

  
 15-10-2025  
 SAE (ELECTRICAL)  
 CHANDERNAGORE MUNICIPAL CORPORATION

  
 AE (MECHANICAL) 15/10/25  
 CHANDERNAGORE MUNICIPAL  
 CORPORATION

  
 COMMISSIONER  
 CHANDERNAGORE MUNICIPAL CORPORATION

  
 MAYOR  
 CHANDERNAGORE MUNICIPAL  
 CORPORATION

# CHANDERNAGORE MUNICIPAL CORPORATION

## ESTIMATE

APAS

Estimated Cost:- Rs. 38,451/-

Date of Completion: 7 days

Name of the work :- Enhancement of Illumination at the poles at Dinemardanga Hothat Colony Under  
APAS Scheme -- Booth 146 sl no:-12 ward 22

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [ Make-Crompton/Philips/Havells ] Warranty Period- 7 Years Ref: Approved rate vide Memo No.:-1528(3)-UDMA-13013(99)/3/2020-ESTT-TCP SEC-Dept. of UDMA Dated, Kolkata,the 8th December,2020 Ref: Rate Redrive	9	Nos	2179.46	19615.14
2	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting Ref: PWD(Electrical) Schedule 2014, H-5,H(4)	9	Nos	1335.00	12015.00
<b>Sub Total</b>				RS	<b>31,630.14</b>
<b>Add (@18%) Gst</b>				RS	<b>5,693.43</b>
<b>Sub Total</b>				RS	<b>37,323.57</b>
<b>Add (@1%) Cess</b>				RS	<b>373.24</b>
<b>Total</b>				Rs	<b>37,696.80</b>
<b>Add (@2%) Contingency</b>				RS	<b>753.94</b>
<b>Total</b>				Rs	<b>38,450.74</b>

*S. J.*  
19.09.2025  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

*B. B. B.*  
19.09.25  
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

*[Signature]*  
19/9/25  
COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION

*[Signature]*  
MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION

**CHANDERNAGORE MUNICIPAL CORPORATION**  
**ESTIMATE**

APAS  
=

Estimated Cost:- Rs. 21,422/-

Date of Completion: 7 days

Name of the work :- Enhancement of Illumination in front of the house of Ashoke Santra at Dinemardanga  
Under

APAS Scheme -- Booth 146 sl no:-05 ward 22

Sl. No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 45 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips/ Havells Warranty Period- 7 Years]	2	Nos	3579.46	7158.92
	Ref: Rate Redrive				
2	Supply and delivery of 90 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips/ Havells Warranty Period- 7 Years]	1	No.	6458.04	6458.04
	Ref: Rate Redrive				
3	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	3	Nos	1335.00	4005.00
	Ref: PWD(Electrical) Schedule 2014, H-5,H(4)				
	<b>Sub Total</b>			RS	17,621.96
	<b>Add (@18%) Gst</b>			RS	3,171.95
	<b>Sub Total</b>			RS	20,793.91
	<b>Add (@1%) Cess</b>			RS	207.94
	<b>Total</b>			Rs	21,001.85
	<b>Add (@2%) Contingency</b>			RS	420.04
	<b>Total</b>			Rs	21,421.89

*J. J.*  
19.09.2015

SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

*Rajak*  
19.09.25

AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

*S.S.*  
19/9/15

COMMISSIONER

CHANDERNAGORE MUNICIPAL CORPORATION

*[Signature]*

MAYOR

CHANDERNAGORE MUNICIPAL CORPORATION