



# CHANDERNAGOFE MUNICIPAL CORPORATION

No.IA/Tend/2025-26/246

Dated. 29.11.2025

## URGENT NOTICE INVITING QUOTATION:

Fund: APAS.

Sealed tenders are invited from the experienced, resourceful and interested Vendors/Suppliers/Contractors to complete the work of the following items required for Electric Dept. under the control of this Corporation individually or unanimously. Vendors/Supplier:/Contractors may participate for both individually or unanimously of the following works.

Quotations are to be given on or before 08.12.2025 within 3 p.m. and will be opened on the same day at 3.30 p.m. Rates should be inclusive of all the taxes and other incidental charges if any. In case of accepted tenderers whose rates have been accepted, fails to supply the required items within the stipulated date & time, necessary items will be purchased from the available sources and the difference in cost will be recovered from the tenderers. The Corporation reserves the right to accept or reject any tender without assigning any reason whatsoever.

Sl. No.	Description of the Items	Booth No	Sl. No.	Ward No.	Quantity Required	Rate Required
1.	Installation of electric pole with light in front of Pikasi Abasn at Sener Bagan..	112	09	16	One Job	Entire Work
2.	Enhancement of illumination (wattage) in front of the house of Nikhil Pal and Ashish Chowdhury at hatkhola Manasatala.	114	05	16	One Job	Entire Work
3.	Installation of electric pole with light at Hatkhola Nonatola Main Road.	113	10	16	One Job	Entire Work

**Encl: Estimate of all Works are attached herewith.**

PAN, GST and Copy of Trade Enlistment Certificate are Mandatory in this regard.

*[Signature]*  
29/11/25  
Commissioner/Secretary/Finance Officer  
Chandernagore Municipal Corporation  
Secretary  
Chandernagore Municipal Corporation

No.IA/Tend/2025-26/246/1 (12)

Date: 29.11.2025

**Copy to :-**

1. Mayor
2. Dy Mayor
3. MMIC ( Street Light / Education / Trade Licence / Health / W.W / Sports / Store & Garage )
4. Commissioner/Secretary/Finance Officer
5. Engineer
6. A. O.
7. SAE (Elect)
8. S.A.-I Please publish in Office Website.
9. Rabindra Bhaban
10. Office Notice Board

*[Signature]*  
29/11/25  
Commissioner/Secretary/Finance Officer  
Chandernagore Municipal Corporation  
Secretary  
Chandernagore Municipal Corporation



**CHANDERNAGORE MUNICIPAL CORPORATION**  
**ESTIMATE**

APAS

Estimated Cost:- Rs.32,435/-

Date of Completion: 10 days

Name of the work :- Installation of electric pole with light in front of the Pikashi Abason at Sener Bagan under  
APAS Scheme -- Booth 112 sl no 09 ward no 16

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supplying of Swaged Steel Tubular pole (IS 2713, Pt. II 1980) for following designation and of following dimensions ---- 410-SP-9 ; 7.5mtrs: 110Kg Ref: UDMA(E/M) (Vol 1) Schedule 2018, page-3,1 (e)	1	No.	9550	9550
2	Erection of Single Steel tubular pole of length as given below with/without sole plate & Cap etc. in CC foundation (Proportion and dimension indicated below), having 600x600x150 mm thick CC (4:2:1) base block below sole plate/pole with hard jhama metal including CC (6:3:1) muffing 0.30 mts. dia and 0.30 mts. above ground level including 3 mm thick neat cemented finish and GI earth bolt after making drilled holes etc. on pole & carriage of pole upto 1.6 Km from Store to work-site including filling up the excavated earth pit with shifted soil and ramming properly ---- Upto 9.0 mtr. Size 0.6x0.6x1.70 mts Ref: PWD(Electrical) Schedule 2017, H-1, (A)1(a)	1	No.	2835.00	2835.00
3	Extra on items 1& 2 above, for providing CC (6:3:1) base block (around the pole) dimension 0.45x0.45x0.60 mt. above ground level, neatly cemented finish (3 mm thick), at the base pole (in lieu of CC muffing) suitable for alkathene/ polythene pipe entry as directed for street light wiring, incl. S & F 20cmx15cmx10cm GI Loop box, 16SWG & incl. drilled hole in pole Ref: PWD(Electrical) Schedule 2017, H-1, (A)3(a)(ii)	1	No.	740.00	740.00
4	Painting of Steel Tubular Pole of lengths and no. of coats of paint, as given below with ready mixed paint/primer of approved make, and brand incl. preparation of surface by sand paper/emery paper, cleaning etc. for receiving fresh coat of paint ---- (a) Upto 9.0 mtr. long pole -- (i)1st coat of aluminium paint over 1 coat of RO priming (ii)2nd coat of aluminium paint over 1st coat Ref: PWD(Electrical) Schedule 2017, H-2, (A)4(a)	1	No.	329.00	329.00
5	Supplying of 1.1 KV. Grade PVC insulated Conductor of following cables (make: Polycab/ Gloster/Havells): 2 core 4sqmm Ref: UDMA(E/M) Schedule 2018, page-11, 1(a)1	50	Mtr	73.00	3650.00
6	Laying of cable upto 2 core 25 sqmm on wall/surface incl. S & F MS saddles with earthing attachment in 10 SWG GI (Hot Dip) Wire, making holes etc. as necy. mending good damages and painting ---- Ref: PWD(Electrical) Schedule 2017, F-1, 2(a)	50	Mtr	57.00	2850.00

7	Supply and delivery of 45 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached [ Make-Crompton /Philips / Havells ) Warranty Period- 7 Years]	1	No.	3579.46	3579.46
	Ref: Rate Redrive				
8	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	1	No.	1335.00	1335.00
	Ref: PWD(Electrical) Schedule 2017, H-5,H(4)				
9	Supplying and fixing 240/415 V MCB of Breaking capacity 10 KA & C characteristics on din rail of existing DBs and necessary connection --- 6-32 A SPN ( Standard )	1	No.	444.00	444.00
	Ref: PWD(Electrical) Schedule 2017, D-7/8				
10	Earthing with 50mm dia GI pipe 3.64mm thick x 3.04mtrs long and 1x4SWG GI (Hot Dip) wire (4mtrs long), 13mm dia x 80mm long GI bolts, double nuts, double washers incl. S&F 15mm dia GI pipe protection (1mtr long) to be filled with bitumen partly under the ground level and partly above ground level driven to an average depth of 3.65mtrs below the ground level as below: by ISI-Medium GI pipe	1	No.	1369.00	1369.00
	Ref:PWD Schedule (Electrical)2017, Page-G-1/ 2(a)				
	Sub Total		RS		26,681.46
	Add (@18%) Gst		RS		4,802.66
	Sub Total		RS		31,484.12
	Add (@1%) Cess		RS		314.84
	Total		Rs		31,798.96
	Add (@2%) Contingency		RS		635.98
	Total		Rs		32,434.94
	Say		Rs		32,435

*S. L.*  
17-11-2025  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

*R. Rajak*  
13/11/25  
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

*S.*  
COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION

*S.*  
MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION

**CHANDERNAGORE MUNICIPAL CORPORATION**  
**ESTIMATE**

APAS

Estimated Cost:- Rs.8,545/-

Date of Completion: 7 days

Name of the work :- Enhancement of illumination(wattage) infront of the house of Nikhil Pal and Ashish Chowdhury at Hatkhola Manasatala Under APAS Scheme -- Booth 114\_sl no 05\_w 16

SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supply and delivery of 30 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips Havells   Warranty Period- 7 Years	2	Nos	2179.46	4358.92
	Ref: Rate Redrive				
2	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	2	Nos	1335.00	2670.00
	Ref: PWD(Electrical) Schedule 2017, H-5,H(4)				
	<b>Sub Total</b>			RS	7,028.92
	<b>Add (@18%) Gst</b>			RS	1,265.21
	<b>Sub Total</b>			RS	8,294.13
	<b>Add (@1%) Cess</b>			RS	82.94
	<b>Total</b>			Rs	8,377.07
	<b>Add (@2%) Contingency</b>			RS	167.54
	<b>Total</b>			Rs	8,544.61

  
17-11-2025  
SAE (ELECTRICAL)

CHANDERNAGORE MUNICIPAL CORPORATION

  
17/11/25  
AE (MECHANICAL)

CHANDERNAGORE MUNICIPAL CORPORATION



COMMISSIONER  
CHANDERNAGORE MUNICIPAL CORPORATION



MAYOR  
CHANDERNAGORE MUNICIPAL CORPORATION

**CHANDERNAGORE MUNICIPAL CORPORATION**  
**ESTIMATE**

APAS

Estimated Cost:- Rs.49,339/-

Date of Completion: 10 days


Name of the work :- Installation of new electric pole with light at Hatkhola Nonatola Main Road under  
APAS Scheme -- Booth 113 sl no 10 ward no 16

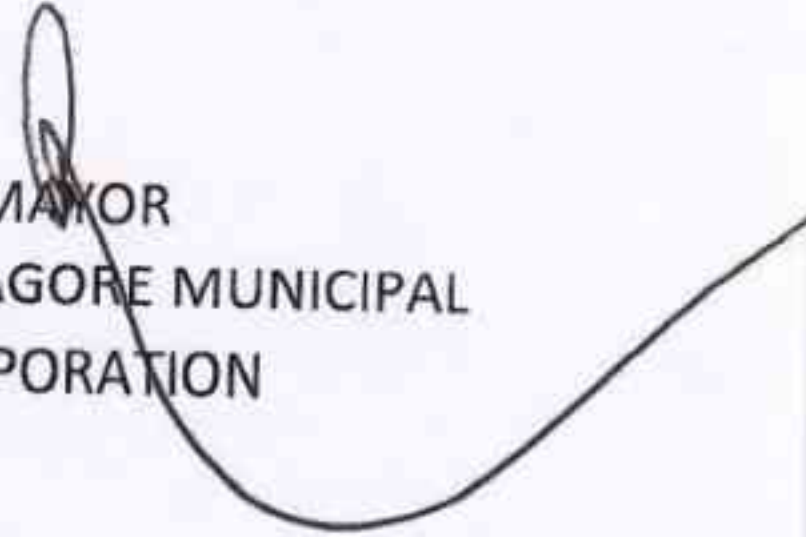
SL No	Description of Work	Qty	Unit	Rate in Rs.	Amount
1	Supplying of Swaged Steel Tubular pole (IS 2713, Pt. II 1980) for following designation and of following dimensions ---- 410-SP-9 ; 7.5mtrs: 110Kg Ref: UDMA(E/M) (Vol 1) Schedule 2018, page-3,1 (e)	1	No.	9550	9550
2	S/F double arm projected lamp bracket (Single pipe bending) of 50mm (2") dia G.I. pipe (ISI medium) of 2.5 mtr long each having 105 degree curvature with reducing socket to be fitted at the top of the pole with bolts, nuts clamps etc. as required Ref: UDMA(E/M) (Vol 1) Schedule 2018, page-5, 23	1	No.	2491	2491
3	Erection of Single Steel tubular pole of length as given below with/without sole plate & Cap etc. in CC foundation (Proportion and dimension indicated below), having 600x600x150 mm thick CC (4:2:1) base block below sole plate/pole with hard jhama metal including CC (6:3:1) muffing 0.30 mts. dia and 0.30 mts. above ground level including 3 mm thick neat cemented finish and GI earth bolt after making drilled holes etc. on pole & carriage of pole upto 1.6 Km from Store to work-site including filling up the excavated earth pit with shifted soil and ramming properly ---- Upto 9.0 mtr. Size 0.6x0.6x1.70 mts Ref: PWD(Electrical) Schedule 2017, H-1, (A)1(a)	1	No.	2835.00	2835.00
4	Extra on items 1& 2 above, for providing CC (6:3:1) base block (around the pole) dimension 0.45x0.45x0.60 mt. above ground level, neatly cemented finish (3 mm thick), at the base pole (in lieu of CC muffing) suitable for alkathene/ polythene pipe entry as directed for street light wiring, incl. S & F 20cmx15cmx10cm GI Loop box, 16SWG & incl. drilled hole in pole Ref: PWD(Electrical) Schedule 2017, H-1, (A)3(a)(ii)	1	No.	740.00	740.00
5	Painting of Steel Tubular Pole of lengths and no. of coats of paint, as given below with ready mixed paint/primer of approved make, and brand incl. preparation of surface by sand paper/emery paper, cleaning etc. for receiving fresh coat of paint ---- (a) Upto 9.0 mtr. long pole -- (i)1st coat of aluminium paint over 1 coat of RO priming (ii)2nd coat of aluminium paint over 1st coat Ref: PWD(Electrical) Schedule 2017, H-2, (A)4(a)	1	No.	329.00	329.00
6	Supplying of 1.1 KV. Grade PVC insulated Conductor of following cables (make: Polycab/ Gloster/Havells): 2 core 4sqmm Ref: UDMA(E/M) Schedule 2018, page-11, 1(a)1	100	Mtr	73.00	7300.00
7	Laying of cable upto 2 core 25 sqmm on wall/surface incl. S & F MS saddles with earthing attachment in 10 SWG GI (Hot Dip) Wire, making holes etc. as necy. mending good damages and painting ----	100	Mtr	57.00	5700.00

Ref: PWD(Electrical) Schedule 2017, F-1, 2(a)			
8	Supply and delivery of 45 watt LED Street Light with pressure die cast aluminium housing, IP66 protection, road way luminarie with high power LED as per the detail technical proposal specification & vendor list attached   Make-Crompton /Philips / Havells ) Warranty Period- 7 Years]	2	Nos 3579.46 7158.92
Ref: Rate Redrive			
9	Fixing outdoor type fluorescent/SV/MV light fitting on pole including S&F 40 mm dia x 1.68 mts. long GI Pipe (ISI-Medium) bracket with 40 mmx10 mm thick, MS clamp etc. and providing wiring with 2x1/1.40 PVC insulated and sheathed wire (single core) from loop box at the base of pole to light fitting through pole & bracket (without control switch) including making connections & painting	2	Nos 1335.00 2670.00
Ref: PWD(Electrical) Schedule 2017, H-5,H(4)			
10	Supplying and fixing 240/415 V MCB of Breaking capacity 10 KA & C characteristics on din rail of existing DBs and necessary connection --- 6-32 A SPN ( Standard )	1	No. 444.00 444.00
Ref: PWD(Electrical) Schedule 2017, D-7/8			
11	Earthing with 50mm dia GI pipe 3.64mm thick x 3.04mtrs long and 1x4SWG GI (Hot Dip) wire (4mtrs long), 13mm dia x 80mm long GI bolts, double nuts, double washers incl. S&F 15mm dia GI pipe protection (1mtr long) to be filled with bitumen partly under the ground level and partly above ground level driven to an average depth of 3.65mts below the ground level as below: by ISI-Medium GI pipe	1	No. 1369.00 1369.00
Ref:PWD Schedule (Electrical)2017, Page-G-1/ 2(a)			
Sub Total		RS	40,586.92
Add (@18%) Gst		RS	7,305.65
Sub Total		RS	47,892.57
Add (@1%) Cess		RS	478.93
Total		Rs	48,371.49
Add (@2%) Contingency		RS	967.43
Total		Rs	49,338.92
Say		Rs	49,339

  
 17.11.2025  
 SAE (ELECTRICAL)  
 CHANDERNAGORE MUNICIPAL CORPORATION

  
 17/11/25  
 AE (MECHANICAL)  
 CHANDERNAGORE MUNICIPAL CORPORATION

  
 COMMISSIONER  
 CHANDERNAGORE MUNICIPAL CORPORATION

  
 MAYOR  
 CHANDERNAGORE MUNICIPAL CORPORATION